
BEULCO®

Product Group **E**

Water Meter Installation Sets and Accessories

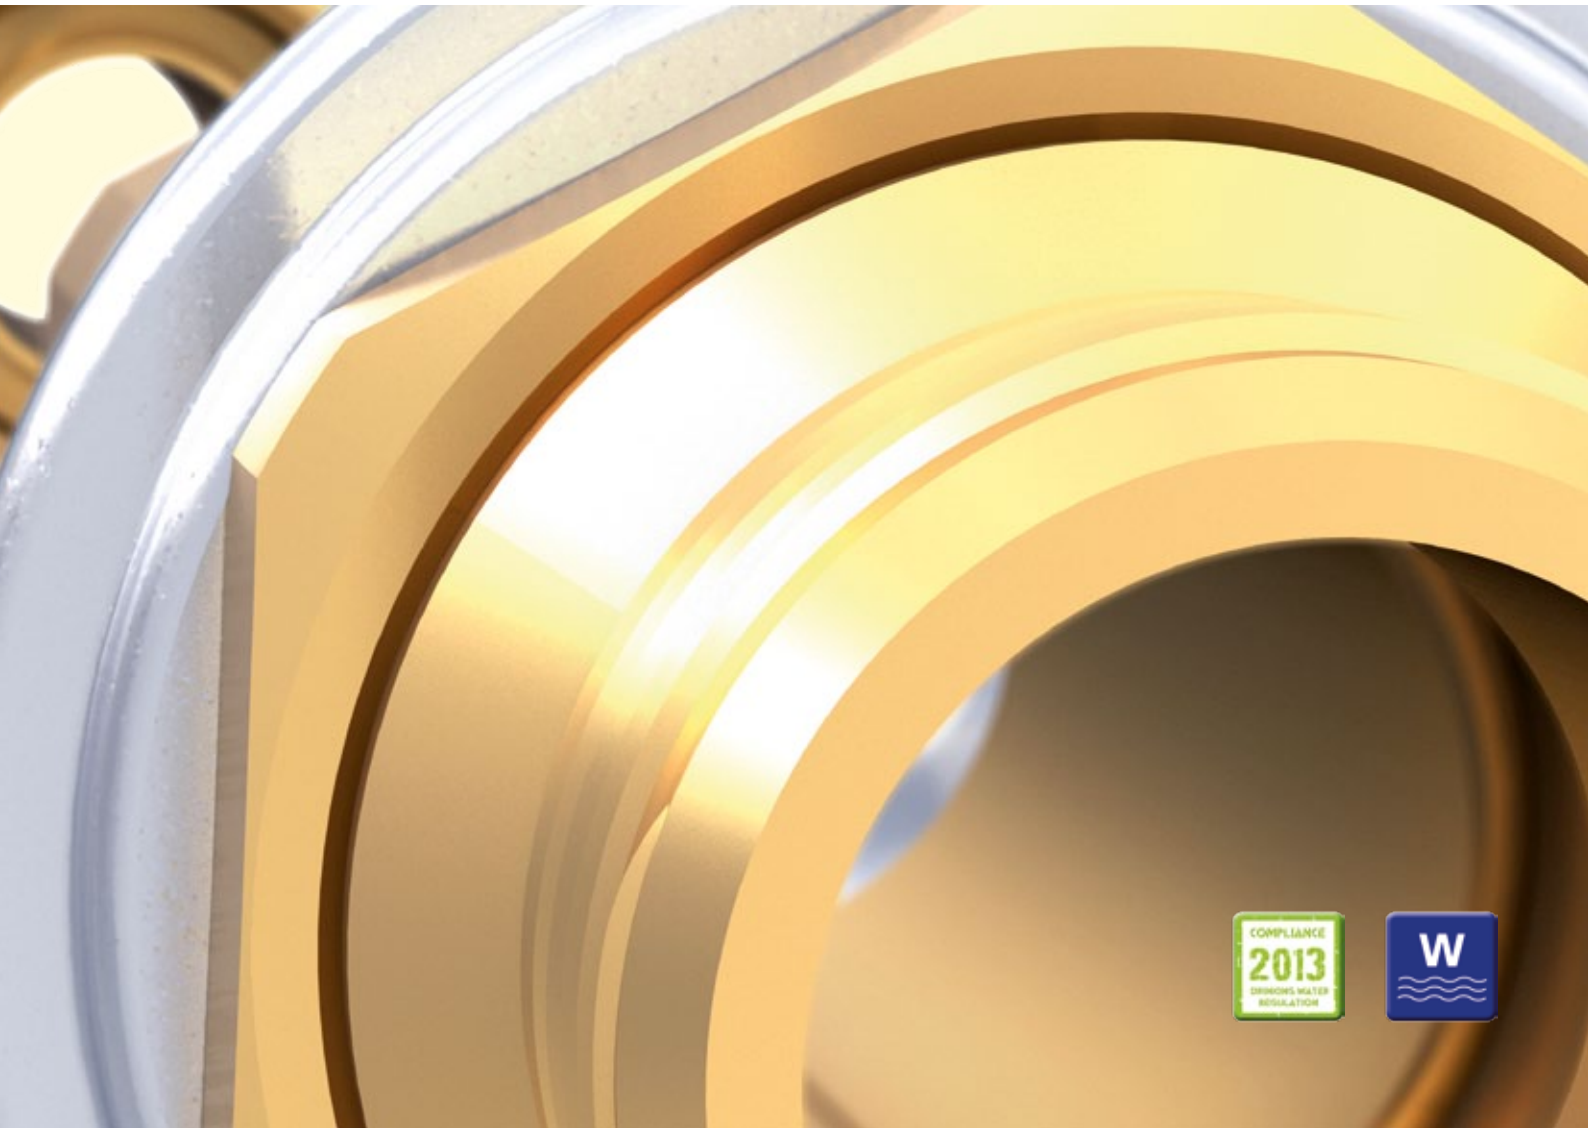

made
in
Germany


Product Group **E**

BEULCO® water meter installation sets

with brackets made of stainless steel, material 1.4301

Acc. to DIN 1988 part 2 holding devices for house water meters, e.g. water meter brackets, have to be installed in new systems and when changing old systems.

Competent experts have recognized the practice-proved advantages of our water meter installation sets and have been using this perfected technique for years.

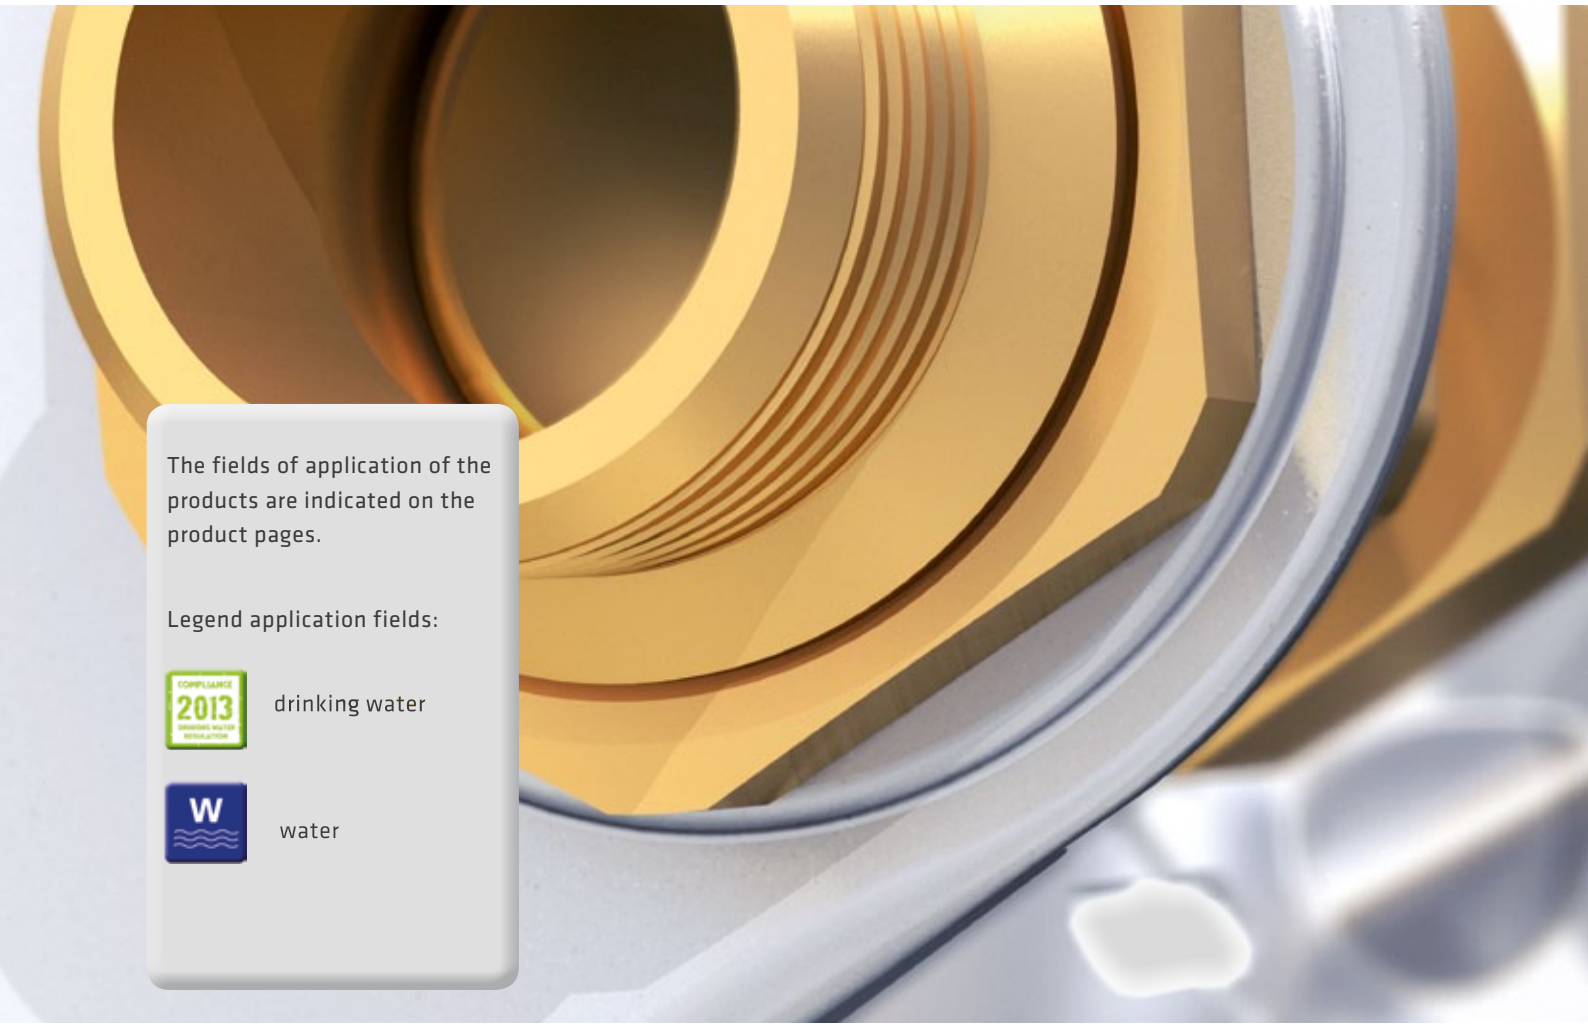

The fields of application of the products are indicated on the product pages.

Legend application fields:

drinking water

water

Your advantages

- brackets highly stable and deformation resistant made of corrosion-proof stainless steel, material 1.4301
- absolutely without burrs
- cross slots instead of T-slots for optimal adjustment of the brackets
- all brass parts that are in contact with drinking water are made of dezincification resistant material acc. to DIN 50930-6
- an extensive collection of the following types is available for meters from Qn 1.5 up to Qn 10 for horizontal or vertical installation closed, rigid – closed, adjustable – open, rigid (up to Qn 6) – open, adjustable (up to Qn 6)
- long life
- safe against water hammers
- available with valves if requested
- special installation length on request
- German brand

Spare parts and an extensive range or accessories, such as,

- bridging pipes made of stainless steel, brass or plastic in each required installation length
- S-bends for easy installation of water meter lines in existing pipelines
- lead sealing devices
- test adapters

you will find in product group G.


BEULCO® offers water meter installation sets with length adjusting fittings (LAF) in two different models namely

- for water meter Qn 1.5 with length adjusting fitting LAF B 61
- for water meter Qn 2.5 with length adjusting fitting LAF B 61 and LAF B 60
- for water meter Qn 6 with length adjusting fitting LAF B 60
- for water meter Qn 10 with length adjusting fitting LAF B 60

They differ in the type of sealing of the sliding sleeve to the housing:


LAF B 61

Sealing is made by an o-ring in a chamber and is reached by a given pressure.

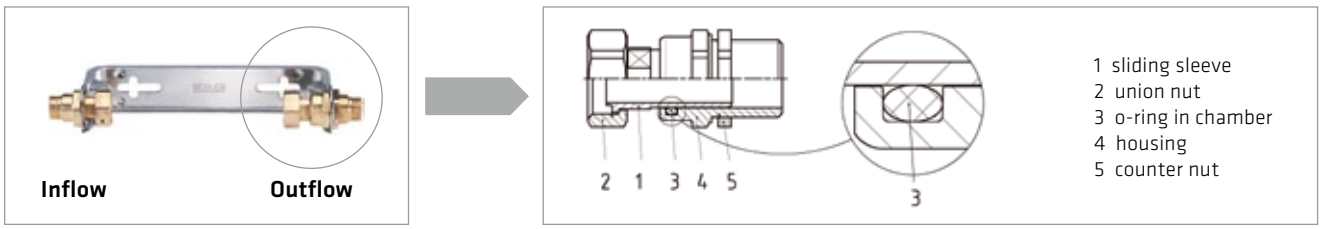

LAF B 60

Sealing is made by an o-ring and becomes operative by tightening the pressure nut towards the sliding sleeve.

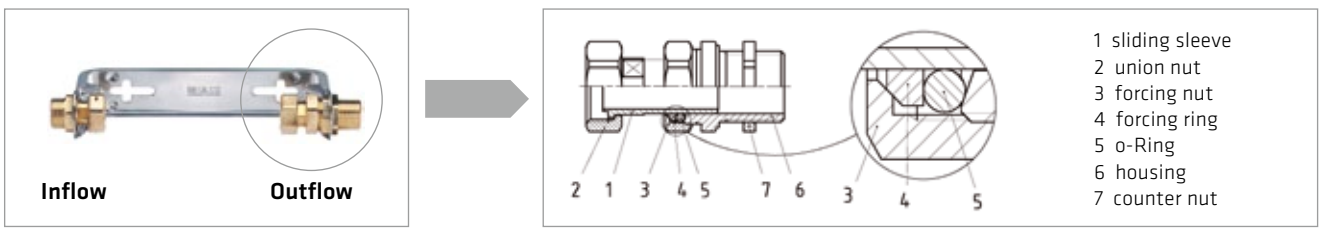

WATER METER INSTALLATION SETS - **for horizontal installation**

with brackets made of stainless steel, material 1.4301, complete with mounting set model 6070E for fastening on the wall



Fig. Model 60110E



Fig. Model 60112E

bracket closed rigid	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 61010E wall distance 82 mm	Qn 1,5 NW 1/2“ inst. length 165 mm LAF B 61	1/2“	1/2“	■	■	1		262199
Model 61110E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 61	3/4“	3/4“	■	■	1		262687*
		1“	1“	■	■	1		262700*
		1 1/4“	1 1/4“	■	■	1		262731
Model 61110EK wall distance 82 mm	NW 1“ inst. length 175 mm union nut 1 1/4“ LAF B 61	3/4“	3/4“	■	■	1		309818
		1“	1“	■	■	1		315048
		1 1/4“	1 1/4“	■	■	1		272334
Model 60110E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 60	3/4“	3/4“	■	■	1		263745*
		1“	1“	■	■	1		263769*
		1 1/4“	1“	■	■	1		263783
		1 1/4“	1 1/4“	■	■	1		263790
Model 60210E wall distance 87 mm	Qn 6 NW 1“ inst. length 260 mm LAF B 60	1“	1“	■	■	1		264292
		1 1/4“	1 1/4“	■	■	1		264315
		1 1/2“	1 1/2“	■	■	1		264346
Model 60310E wall distance 130 mm	Qn 10 NW 1 1/2“ inst. length 300 mm LAF B 60							
		1 1/2“	1 1/2“	■	■	1		264780
		2“	2“	■	■	1		264803

bracket closed adjustable	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 61112E wall distance 92-132 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 61	3/4“	3/4“	■	■	1		262779*
		1“	1“	■	■	1		262793*
		1 1/4“	1“	■	■	1		262816
		1 1/4“	1 1/4“	■	■	1		262823
Model 60112E wall distance 92-132 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		263851*
		1 1/4“	1“	■	■	1		263875
		1 1/4“	1 1/4“	■	■	1		263882
Model 60212E wall distance 112-172 mm	Qn 6 NW 1“ inst. length 260 mm LAF B 60	1“	1“	■	■	1		264384
		1 1/4“	1“	■	■	1		264391
		1 1/4“	1 1/4“	■	■	1		264407
		1 1/2“	1 1/2“	■	■	1		264438
Model 60312E wall distance 155-199 mm	Qn 10 NW 1 1/2“ inst. length 300 mm LAF B 60							
		1 1/2“	1 1/2“	■	■	1		264810
		2“	2“	■	■	1		264834

** with one-piece inflow connector*

WATER METER INSTALLATION SETS - **for horizontal installation**

with brackets made of stainless steel, material 1.4301, complete with mounting set model 6070E for fastening on the wall



Fig. Model 60120E



Fig. Model 60122E

bracket open rigid	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 61020E wall distance 82 mm	Qn 1,5 NW 1/2“ inst. length 165 mm LAF B 61	3/4“	3/4“	■	■	1		262335
Model 61120E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 61	3/4“	3/4“	■	■	1		262861*
		1“	3/4“	■	■	1		262878*
		1“	1“	■	■	1		262885*
		1 1/4“	1“	■	■	1		262908*
		1 1/4“	1 1/4“	■	■	1		262915*
Model 60120E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 60	3/4“	3/4“	■	■	1		263400*
		1“	3/4“	■	■	1		263417*
		1“	1“	■	■	1		263424*
		1 1/4“	1 1/4“	■	■	1		263455*
		1 1/2“	1 1/2“	■	■	1		263486*
Model 60220E wall distance 87 mm	Qn 6 NW 1“ inst. length 260 mm LAF B 60	1“	1“	■	■	1		263585
		1 1/4“	1 1/4“	■	■	1		263608*
		1 1/2“	1 1/2“	■	■	1		263639*
		2“	2“	■	■	1		263653*

bracket open adjustable	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 61122E wall distance 92-132 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 61	3/4“	3/4“	■	■	1		262953*
		1“	1“	■	■	1		262977*
		1 1/4“	1“	■	■	1		262991*
		1 1/4“	1 1/4“	■	■	1		263004*
Model 60122E wall distance 92-132 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 60	3/4“	3/4“	■	■	1		263929*
		1“	1“	■	■	1		263943*
		1 1/4“	1“	■	■	1		263967*
		1 1/4“	1 1/4“	■	■	1		263974*
Model 61122EK wall distance 92-132 mm	NW 1“ union nut 1 1/4“ inst. length 175 mm LAF B 61	1“	1“	■	■	1		325887
Model 60222E wall distance 112-172 mm	Qn 6 NW 1“ inst. length 260 mm LAF B 60	1“	1“	■	■	1		264469
		1 1/4“	1 1/4“	■	■	1		264483*
		1 1/2“	1 1/2“	■	■	1		264513*
		2“	2“	■	■	1		264537*

** with one-piece inflow connector*

WATER METER INSTALLATION SETS

for horizontal installation

with brackets made of stainless steel, material 1.4301, complete with mounting set model 6070E for fastening on the wall

All parts with contact to water are made of lead-free brass. The new material is characterized by corrosion resistance and high strength. This offers safe protection against stress corrosion cracking.

Furthermore, the material is antimicrobial and thus meets highest demands.



Fig. Model 60120E



Fig. Model 60122E

bracket open rigid	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 60120 BF wall distance 82 mm	Qn 2,5	3/4“	3/4“	■	■	1		340934
	NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		340941
		1 1/4“	1 1/4“	■	■	1		340958

bracket open adjustable	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 60122 BF wall distance 92-132 mm	Qn 2,5	3/4“	3/4“	■	■	1		340965
	NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		340972
		1 1/4“	1 1/4“	■	■	1		340989

WATER METER INSTALLATION SETS

for horizontal / vertical installation

with brackets made of stainless steel, material 1.4301, complete with mounting set model 6070E for fastening on the wall

inflow with ball valve without drain

outflow with ball valve with drain and integrated backflow preventer



Fig. Model 67120E

for horizontal installation

bracket open rigid	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 67120E wall distance 82 mm	Qn 2,5							
	NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		356348

for vertical installation

Model 67121E wall distance 82 mm	Qn 2,5							
	NW 3/4“ inst. length 105 mm LAF B 60	1“	1“	■	■	1		356997

WATER METER INSTALLATION SETS

for horizontal installation

with brackets made of stainless steel, material 1.4301, complete with mounting set model 6070E for fastening on the wall

with unchokable valve without drain at the inflow,
KFR-valve with drain at the outflow, both with non-rising spindle
(brass material of valves CuZn40Pb2 acc. to DIN 50930-6)



Fig. Model 64120E

bracket open rigid	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 65120E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 61	1“	1“	■	■	1		264940
		1 1/4“	1 1/4“	■	■	1		264957
Model 64120E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		265022
		1 1/4“	1 1/4“	■	■	1		265039
Model 64220E wall distance 87 mm	Qn 6 NW 1“ inst. length 260 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		265107
		1 1/2“	1 1/2“	■	■	1		265114



Fig. Model 64122E

bracket open adjustable	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 65122E wall distance 92-132 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 61	1“	1“	■	■	1		264964
		1 1/4“	1 1/4“	■	■	1		264971
Model 64122E wall distance 92-132 mm	Qn 2,5 NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		265046
		1 1/4“	1 1/4“	■	■	1		265053
Model 64222E wall distance 112-172 mm	Qn 6 NW 1“ inst. length 260 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		265121
		1 1/2“	1 1/2“	■	■	1		265138

made in Germany

WATER METER INSTALLATION SETS - **for vertical installation**

with brackets made of stainless steel, material 1.4301, complete with mounting set model 6070E for fastening on the wall



Fig. Model 60111E

bracket closed rigid	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 61011E wall distance 82 mm	Qn 1,5 NW 1/2“ inst. length 105-110 mm LAF B 61	1/2“	1/2“	■	■	1		262434
		3/4“	3/4“	■	■	1		262458
Model 61111E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 105-110 mm LAF B 61	3/4“	3/4“	■	■	1		263042
		1“	1“	■	■	1		263066
Model 60111E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 105-110 mm LAF B 60	3/4“	3/4“	■	■	1		264018
		1“	1“	■	■	1		264032
Model 60211E wall distance 87 mm	Qn 6 NW 1“ inst. length 150 mm LAF B 60	1“	1“	■	■	1		264544
Model 60311E wall distance 130 mm	Qn 10 NW 1 1/2“ inst. length 200 mm LAF B 60	1 1/2“	1 1/2“	■	■	1		264841

water meter installation sets - **for vertical installation**

with brackets made of stainless steel, material 1.4301, complete with mounting set model 6070E for fastening on the wall



Fig. Model 60121E



Fig. Model 60126E

bracket open rigid	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 61021E wall distance 82 mm	Qn 1,5 NW 1/2“ inst. length 105-110 mm LAF B 61	1/2“	1/2“	■	■	1		262564
Model 61121E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 105-110 mm LAF B 61	1“	1“	■	■	1		263240*
Model 60121E wall distance 82 mm	Qn 2,5 NW 3/4“ inst. length 105-110 mm LAF B 60	3/4“	3/4“	■	■	1		263493*
		1“	1“	■	■	1		263516*
		1 1/4“	1 1/4“	■	■	1		263547*
Model 60221E wall distance 87 mm	Qn 6 NW 1“ inst. length 150 mm LAF B 60	1“	1“	■	■	1		263660
		1 1/4“	1 1/4“	■	■	1		263684*

** with one-piece inflow connector*

bracket open adjustable	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 61026E wall distance 92-132 mm	Qn 1,5 NW 1/2“ inst. length 105-110 mm LAF B 61	1/2“	1/2“	■	■	1		262625
Model 61126E wall distance 92-132 mm	Qn 2,5 NW 3/4“ inst. length 105-110 mm LAF B 61	1“	1“	■	■	1		263332*
		1 1/4“	1“	■	■	1		263356*
Model 60126E wall distance 92-132 mm	Qn 2,5 NW 3/4“ inst. length 105-110 mm LAF B 60			■	■	1		
		3/4“	3/4“	■	■	1		264193*
		1“	1“	■	■	1		264216*

** with one-piece inflow connector*

CONNECTOR

for water meter installation set



Model 60140E



Model 60140EK

	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 61040E	Qn 1,5	1/2“	-	■	■	5		152308
		3/4“	-	■	■	5		152315
Model 60140E	Qn 2,5	3/4“	-	■	■	5		151233
		1“	-	■	■	10		151240
		1 1/4“	-	■	■	5		151257
Model 60140EK		3/4“	-	■	■	1		346578
		1“	-	■	■	1		216963
		1 1/4“	-	■	■	1		246892
Model 60240E	Qn 6	1“	-	■	■	1		151271
		1 1/4“	-	■	■	1		151288
		1 1/2“	-	■	■	1		151295
Model 60340E	Qn 10	1 1/2“	-	■	■	1		151349
		2“	-	■	■	1		151356



CONNECTOR

for water meter installation set **made of lead-free brass**

	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 60160BF	Qn 2,5	3/4“	-	■	■	5		347346
		1“	-	■	■	5		347360
		1 1/4“	-	■	■	5		347384



CONNECTOR

with one-piece socket

	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 60160E	Qn 2,5	3/4“	-	■	■	5		326464
		1“	-	■	■	10		275595
		1 1/4“	-	■	■	5		326488
Model 60260E	Qn 6	1 1/4“	-	■	■	1		326501
		1 1/2“	-	■	■	1		326525

LENGTH ADJUSTING FITTING

for water meter installation set



LAF B 61



LAF B 61 - Model 61130EK



LAF B 60

	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 61030E LAF B 61	Qn 1,5	-	1/2“	■	■	1		152193
		-	3/4“	■	■	1		152209
		-	1“	■	■	1		152216
Model 61130E LAF B 61	Qn 2,5	-	3/4“	■	■	5		152223
		-	1“	■	■	10		152230
		-	1 1/4“	■	■	5		152247
Model 61130EK LAF B 61		-	3/4“	■	■	1		346561
		-	1“	■	■	1		216956
		-	1 1/4“	■	■	1		246885
Model 60130E LAF B 60	Qn 2,5	-	3/4“	■	■	5		151103
		-	1“	■	■	10		151110
		-	1 1/4“	■	■	5		151127
Model 60230E LAF B 60	Qn 6	-	1“	■	■	1		151141
		-	1 1/4“	■	■	1		151158
		-	1 1/2“	■	■	1		151165
Model 60330E LAF B 60	QN 10	-	1 1/2“	■	■	1		151219
		-	2“	■	■	1		151226



LAF B 60

LENGTH ADJUSTING FITTING

for water meter installation set **made of lead-free brass**

	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 60130BF	Qn 2,5	3/4“	-	■	■	5		347339
		1“	-	■	■	5		347353
		1 1/4“	-	■	■	5		347377



LAF B 60

LENGTH ADJUSTING FITTING

for water meter installation set **with screwable sleeve nw** 3/4“

	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 60135	Qn 2,5	3/4“	-	■	■	1		151363
		1“	-	■	■	5		151370

made
in
Germany

Product Group **E**

BEULCO® water meter installation sets with QUICKTURN plunger valves

tested acc. to:

DIN 3546-1/DVGW W 570-1 / DN 25 / NW-6170BS0158

For more comfort! Even if it gets tight!


Either in new buildings or in case of building renovations: Installations in narrow places, possibly overhead, are often a real challenge for planners and plumbers and municipal suppliers. Quickturn plunger valves offer a unique solution. Extremely low installation hights ease planning and mounting. Only a few turns and the valve is open or closed. Replacing valve upper parts is not necessary because of the maintenance-free function elements.

The fields of application of the products are indicated on the product pages.

Legend application fields:

drinking water

water

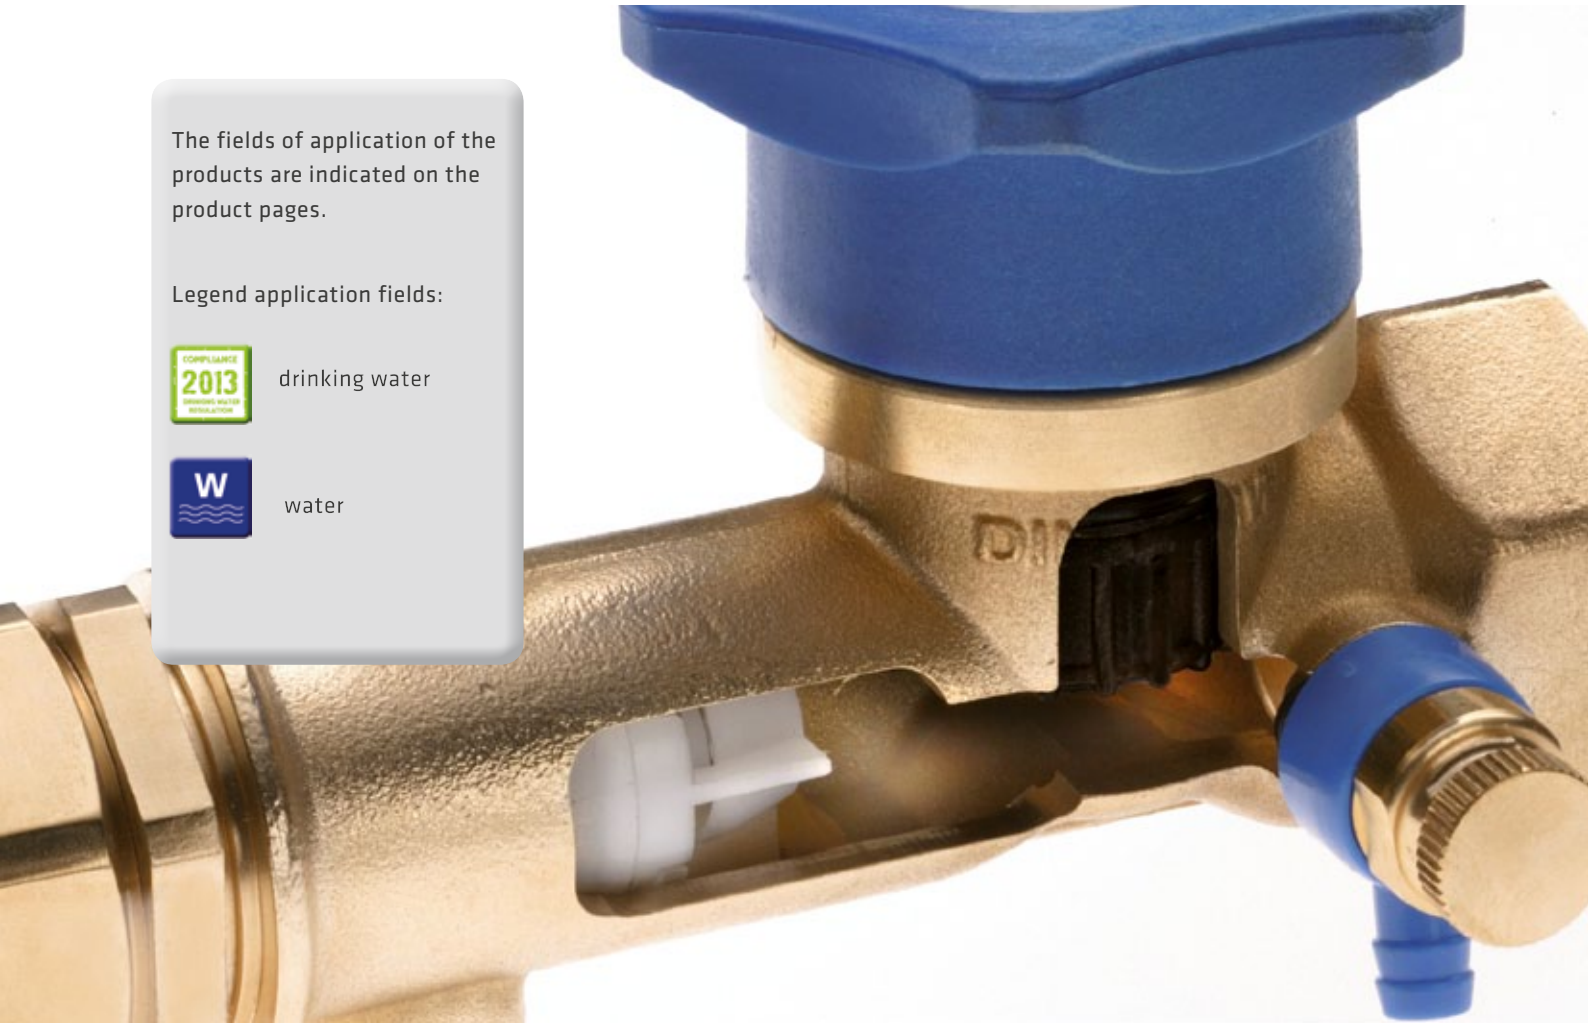

Your advantages

- easy operating by ergonomically formed handles
- quick operating with only a few turns from „on“ to „off“
- turning direction display on the handle
- labelling on the manual handle enables a clear marking of the pipelines
- non-rising upper part
- upper part without clearance volume
- function parts of the piston valve maintenance-free and durably lubricated
- low installation height
- sealing piston resistant against deposits by special profile

Characteristics

- locking of pipeline sections without pressure hammer, quick and safe
- later replacement of upper parts is not needed

Description

- plunger valves registered in prototype and noise behaviour: acc. to DIN-DVGW under no. NW-6170BN0037, SVGW under no. 0210-4557, MPA NRW under no. PA-IX 7892/I
- suitable for drinking and heating water
- operation pressure max. 16 bar
- operation temperature max 90°C
- housing made of dezincification-poor brass acc. to drinking water ordinance DIN 50930-6, point 8.5 dated 01/01/2003
- passage values acc. to DIN 3546 part 1, in connection with DIN EN 1213 volume flow rate class Vb
- blue action handle made of glass-fiber reinforced plastic
- massive sealing piston with double sealing EPDM coating
- all used materials acc. to KTW-recommendation

WATER METER INSTALLATION SETS with **QUICKTURN** plunger valves

complete with mounting set model 6070E for fastening on the wall



Fig. Model 63120E

for horizontal installation

bracket open rigid	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 63120E wall distance 82 mm	Qn 2,5 - NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		319503
		1 1/4“	1 1/4“	■	■	1		332564
Model 63220E wall distance 87 mm	Qn 6 - NW 1“ inst. length 260 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		326334
bracket open adjustable								
Model 63122E wall distance 92-132 mm	Qn 2,5 - NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		327201
		1 1/4“	1 1/4“	■	■	1		332571
Model 63222E wall distance 112-172mm	Qn 6 - NW 1“ inst. length 260 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		327218

bracket open rigid	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 63120EK wall distance 82 mm	NW 3/4“ inst. length 175 mm LAF B 60	1“	1“	■	■	1		328673
bracket open adjustable								
Model 63122EK wall distance 92-132 mm	NW 1“ inst. length 175 mm LAF B 60	1 “	1“	■	■	1		329311

for vertical installation

bracket open rigid	water meter nominal size	inflow	outflow	2013	W	pkg. unit		EAN no. 4027848-
Model 63121E wall distance 82 mm	Qn 2,5 - NW 3/4“ inst. length 105-110 mm LAF B 60	1“	1“	■	■	1		327225
Model 63221E wall distance 87 mm	Qn 6 - NW 1“ inst. length 150 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		327232
bracket open adjustable								
Model 63126E wall distance 92-132 mm	Qn 2,5 - NW 3/4“ inst. length 105-110 mm LAF B 60	1“	1“	■	■	1		327249
Model 63226E wall distance 112-172 mm	Qn 6 - NW 1“ inst. length 150 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		327256

WATER METER INSTALLATION SETS with **QUICKTURN** plunger valves and sampling valve

complete with mounting set model 6070E for fastening on the wall



Fig. Model 63120E

for horizontal installation

bracket open rigid	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 63120E wall distance 82 mm	Qn 2,5 - NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		364282
		1 1/4“	1 1/4“	■	■	1		364299
Model 63220E wall distance 87 mm	Qn 6 - NW 1“ inst. length 260 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		364305
bracket open adjustable								
Model 63122E wall distance 92-132 mm	Qn 2,5 - NW 3/4“ inst. length 190 mm LAF B 60	1“	1“	■	■	1		364312
		1 1/4“	1 1/4“	■	■	1		364336
Model 63222E wall distance 112-172mm	Qn 6 - NW 1“ inst. length 260 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		364329

bracket open rigid	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 63120EK wall distance 82 mm	NW 3/4“ inst. length 175 mm LAF B 60	1“	1“	■	■	1		364381
bracket open adjustable								
Model 63122EK wall distance 92-132 mm	NW 1“ inst. length 175 mm LAF B 60	1 “	1“	■	■	1		364390

for vertical installation

bracket open rigid	**water meter nominal size**	**inflow**	**outflow**	2013	W	pkg. unit		**EAN no. 4027848-**
Model 63121E wall distance 82 mm	Qn 2,5 - NW 3/4“ inst. length 105-110 mm LAF B 60	1“	1“	■	■	1		364343
Model 63221E wall distance 87 mm	Qn 6 - NW 1“ inst. length 150 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		364350
bracket open adjustable								
Model 63126E wall distance 92-132 mm	Qn 2,5 - NW 3/4“ inst. length 105-110 mm LAF B 60	1“	1“	■	■	1		364367
Model 63226E wall distance 112-172 mm	Qn 6 - NW 1“ inst. length 150 mm LAF B 60	1 1/4“	1 1/4“	■	■	1		364374

made in Germany



QUICKTURN INFLOW VALVE

without drain valve

model	nominal size	size	2013	W	pkg. unit		EAN no. 4027848-
63041E	DN 20	3/4“ int. thread x 3/4“ int. thread	■	■	1		333622
63141E	DN 25	1“ int. thread x 1“ int. thread	■	■	1		320776
63241E	DN 32	11/4“ int. thread x 11/4“ int. thread	■	■	1		327171
63341E	DN 40	11/2“ int. thread x 11/2“ int. thread	■	■	1		333639
63441E	DN 50	2“ int. thread x 2“ int. thread	■	■	1		333646



QUICKTURN INFLOW VALVE

without drain valve, with connector

model	water meter nominal size	inflow	2013	W	pkg. unit		EAN no. 4027848-
63140E	Qn 2,5	1“	■	■	1		319473



QUICKTURN OUTFLOW VALVE

with drain valve and test screw

model	nominal size	size	2013	W	pkg. unit		EAN no. 4027848-
63031E	DN 20	3/4“ int. thread x 3/4“ int. thread	■	■	1		333653
63131E	DN 25	1“ int. thread x 1“ int. thread	■	■	1		327188
63231E	DN 32	11/4“ int. thread x 11/4“ int. thread	■	■	1		327195
63331E	DN 40	11/2“ int. thread x 11/2“ int. thread	■	■	1		333660
63431E	DN 50	2“ int. thread x 2“ int. thread	■	■	1		333677



QUICKTURN OUTFLOW VALVE

with drain valve and test screw

with integrated non-return valve and length adjusting fitting

model	water meter nominal size	inflow	2013	W	pkg. unit		EAN no. 4027848-
63130E	Qn 2,5	1“	■	■	1		326914

BEULCO GmbH & Co. KG
Kölner Straße 92
D-57439 Attendorn
P.O.Box 1 20
D-57425 Attendorn
Phone +49 2722 695-0
Fax +49 2722 695-5240
info@beulco.de
www.beulco.de

E/G 11/13e